




REVISIONS				FIELD BY OTHERS	
No.	DATE	DESCRIPTION	DES. CKD.	DESIGN BY:	BY OTHERS
				JMN	
				JMN	
				WML	

GLM ENGINEERING CONSULTANTS, INC.
 1750 WASHINGTON STREET
 HOLLISTON, MASSACHUSETTS 01746
 (508)429-1100 fax (508)429-7160

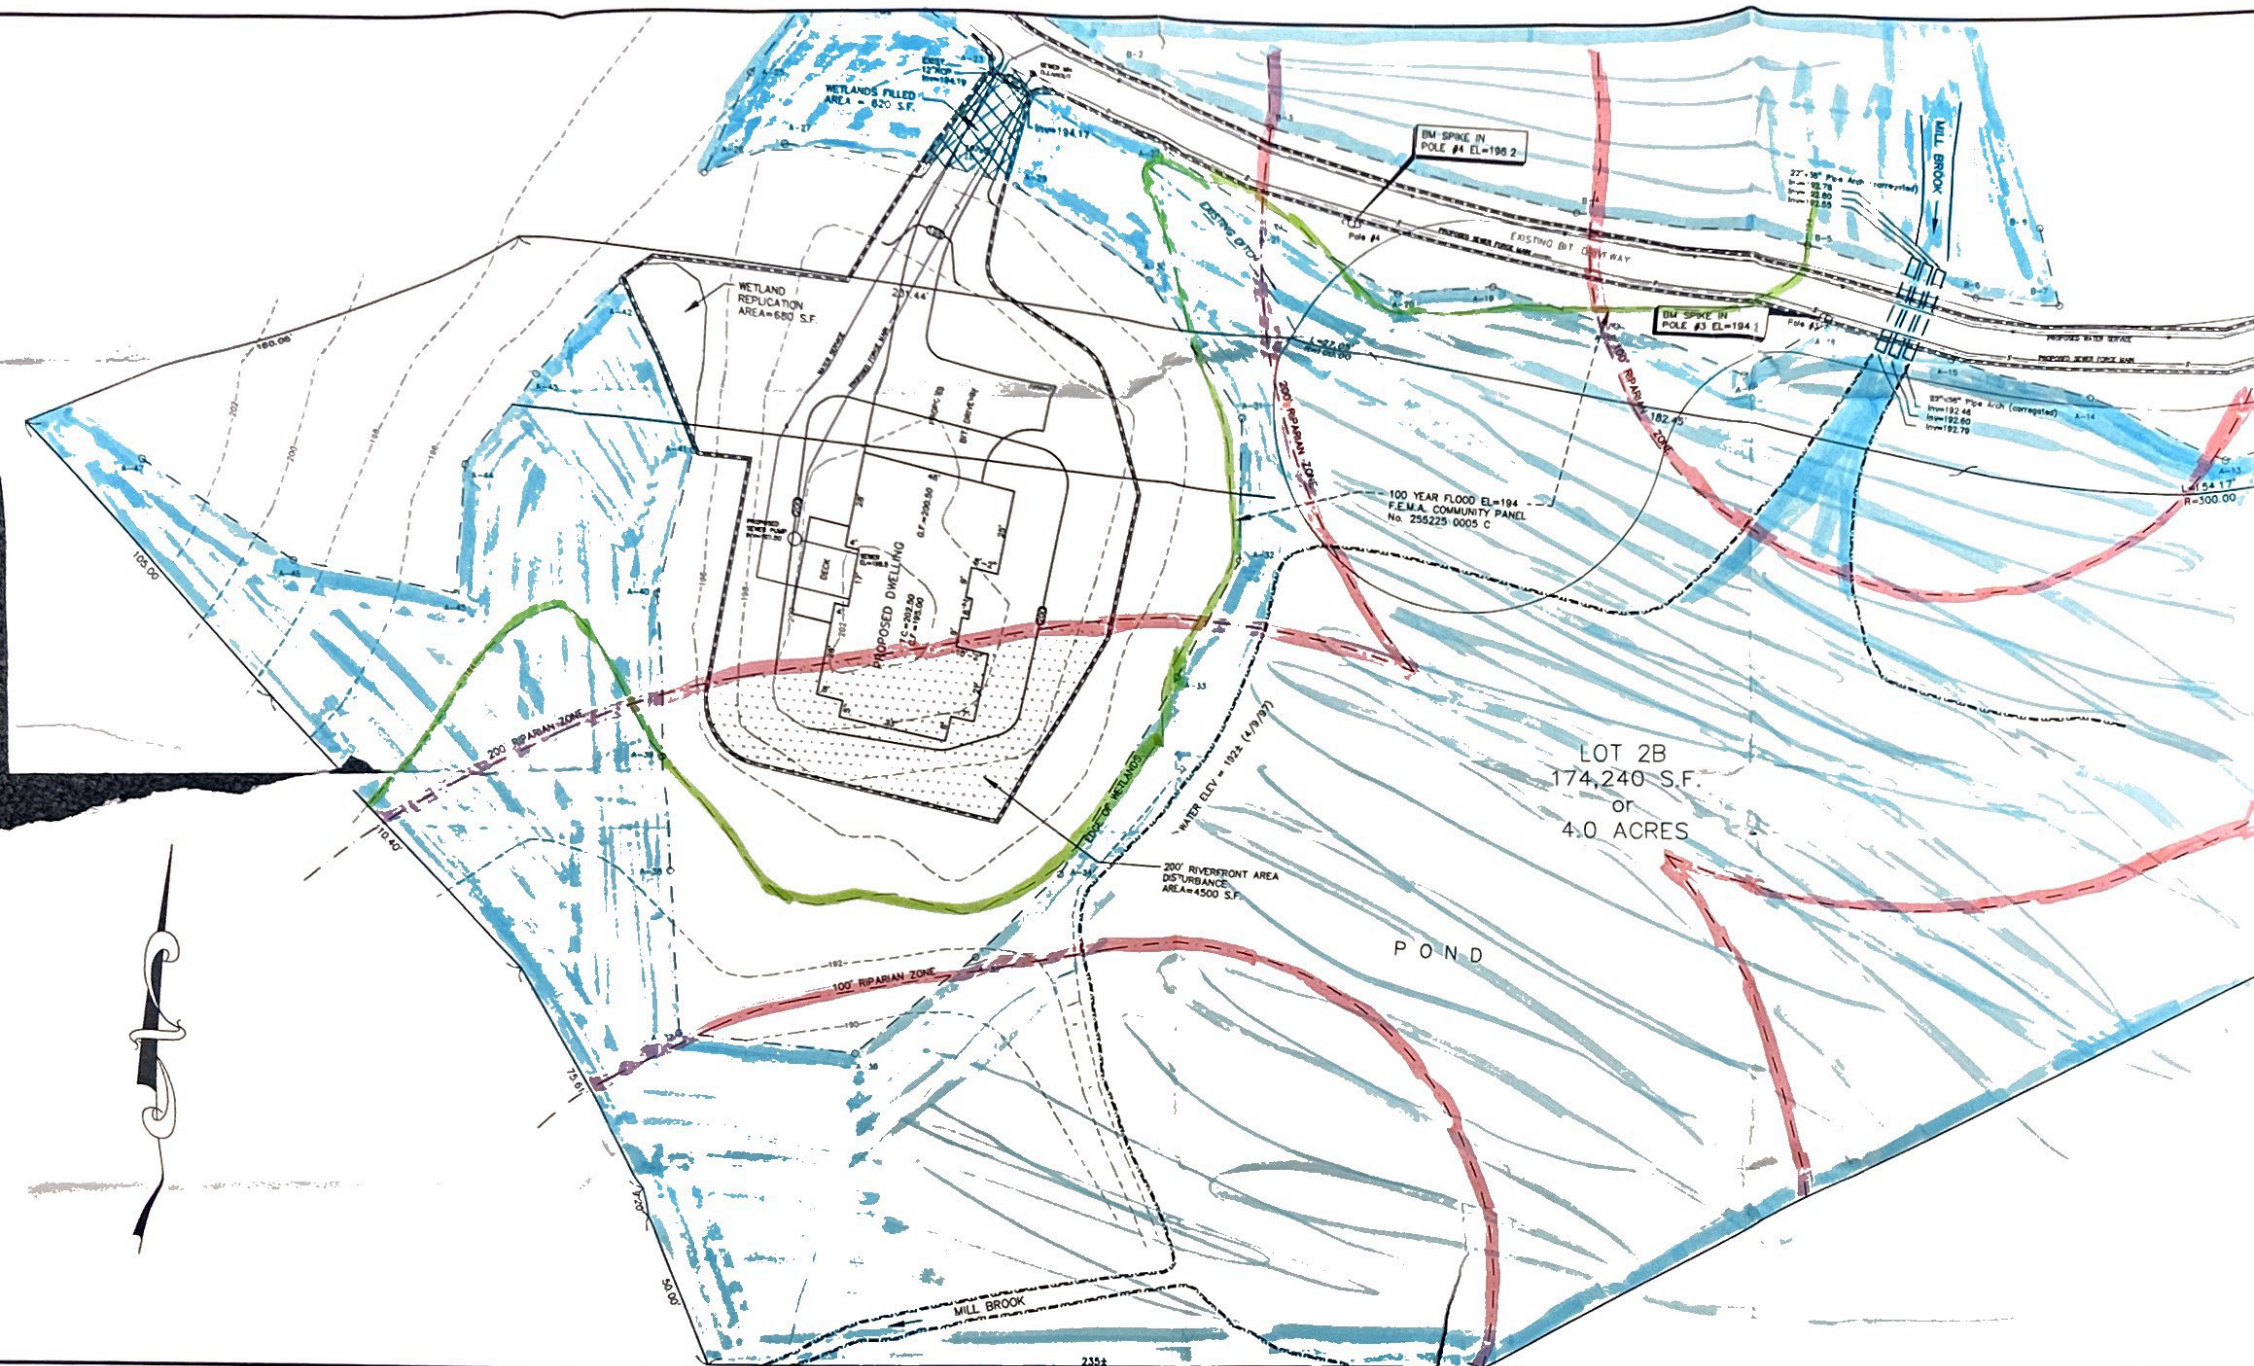

**PROPOSED SITE PLAN OF LAND
 LOT 2B - MILL STREET
 WESTWOOD, MA 02090**
 PREPARED FOR:
 SALVATORE VINCI
 65 BAY COLONY DRIVE
 WESTWOOD, MA 02090

JOB No. 11074
 DATE MARCH 9, 2001
 PLAN No. 25600
 SHEET No. 1 of 3

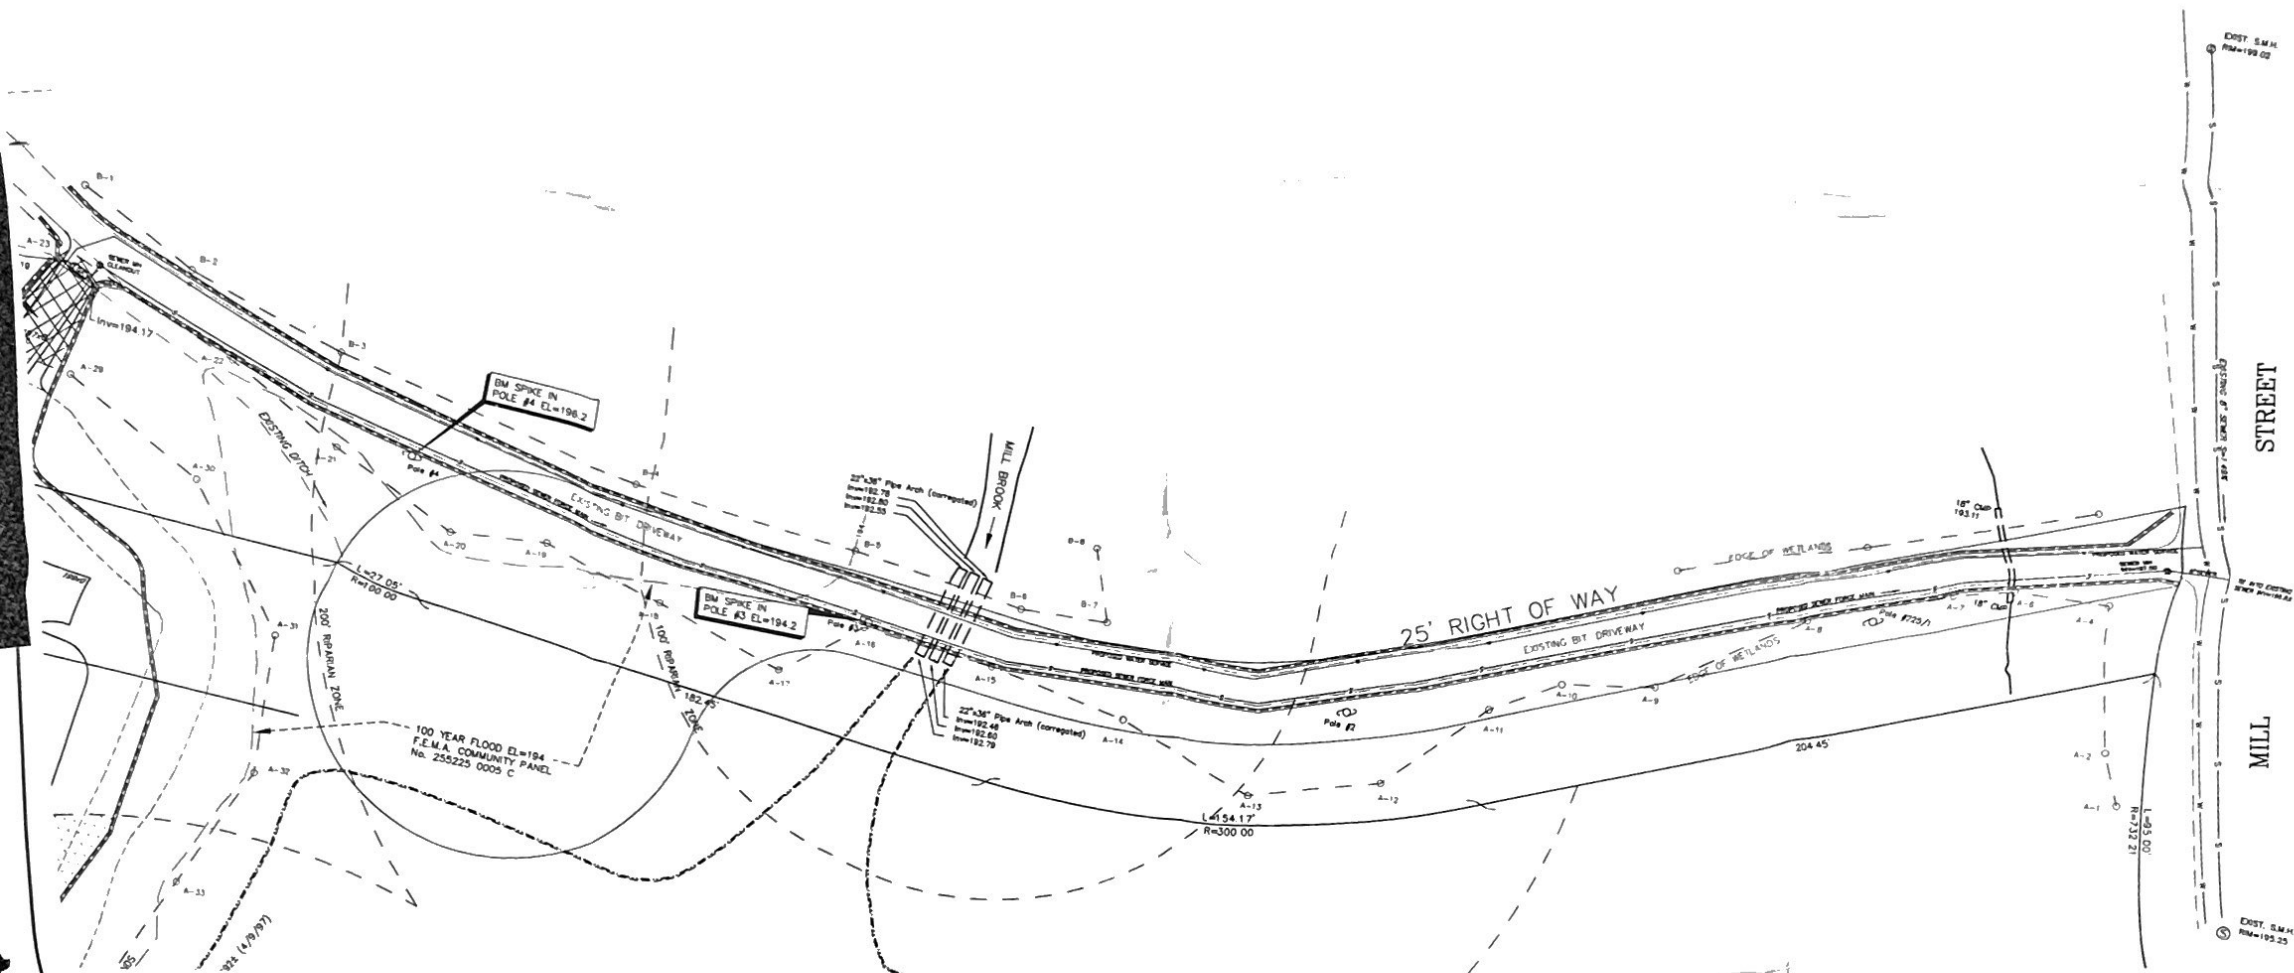

REVISIONS			
No.	DATE	DESCRIPTION	DES CKD




FIELD	BY	OTHERS
DESIGN BY	JMN	
DRAWN BY	JMN	
CHECKED BY	WML	

GLM ENGINEERING
CONSULTANTS, INC.
1750 WASHINGTON STREET
HOLLISTON, MASSACHUSETTS 01746
(508)429-1100 fax (508)429-7160



PROPOSED SITE PLAN OF LAND
LOT 2B - MILL STREET
WESTWOOD, MA 02090
PREPARED FOR:
SALVATORE VINCI
65 BAY COLONY DRIVE
WESTWOOD, MA 02090

JOB No.	11074
DATE	MARCH 9, 2001
PLAN No.	25600
SHEET No.	2 of 3

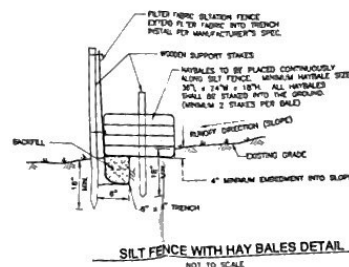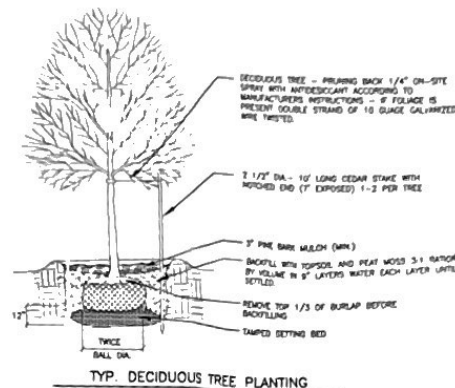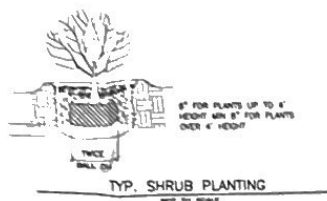

EROSION CONTROL

Prior to commencement of any work within 100 feet of a resource area, continuous erosion control barriers shall be installed, as shown on the Plans, to prevent the introduction of sediment into any wetland resource area. All erosion control barriers shall be constructed as specified on the plan shall be employed. The erosion control barrier shall consist of stacked haybales and silt fence staked at intervals of no greater than 20 feet and keyed into the erosion control barrier. The ground surface of the erosion control barrier shall be a minimum of 6 inches depth. Haybale erosion control barriers shall be double rowed, having their ends pulled against another without leaving appreciable space for sediment to travel through the barrier. Double rows of erosion control barriers shall be placed as needed or directed by the Conservation Commission/Agent. No gravel shall be used to anchor erosion control barriers unless approved by the Conservation Commission/Agent.

Erosion control measures shall be monitored on a daily basis, or as needed and be reinforced, repaired, or replaced when needed, per judgment of the site foreman and/or Conservation Commission. Accumulation of sediment of 6 inches or more shall be removed and has become stabilized with an adequate vegetative cover.

WETLAND REPLICATION AREA

It shall be the responsibility of the Applicant to retain a Botanist, Biologist, Wetland Scientist or other individual with qualifications and a minimum of five years experience in similar wetland replication, and thoroughly versed in the Commonwealth of Massachusetts Wetland Protection Act (MGL Chapter 131, Section 40) and all other relevant regulations of the Department of Environmental Protection. This individual, herein referred to as "Botanist" shall be approved by the Town of Westwood Conservation Commission.

The applicant shall plan and execute operations in a manner minimizing the amount of excavated and exposed fill, or other foreign materials that may be washed or otherwise carried into the replication area.

The Applicant shall install haybales and silt fence fencing to consist of a continuous erosion control barrier which shall be erected along the edge of the proposed replication area and the existing wetlands as shown on the plans and utilize erosion/sedimentation control methods prior to the commencement of any work.

PREPARATION

The wetland replication shall be prepared as follows:

The replication area shall have finished grades which meet the existing grades in adjacent wetland as shown on the plan.

Before planting the replication area, the Applicant shall remove all trees, shrubs, stumps and sod from the replication area. These are not to be stockpiled in the resource area while awaiting disposition.

During the removal of the trees, shrubs, stumps and sod, some of the soils (within the replication area) will likely be removed during this process. Additionally, wetland soils shall be provided in quantities sufficient to establish grades as shown on the primary referenced plans. The replacement soil shall be purchased by the Applicant at a 3:1 mix of loam to silt. The wetland soils shall be stockpiled in the replication area in a manner minimizing travel and subsequent compaction of the underlying material and replacement wetland soils.

All fill must be stockpiled outside of the resource area. Precautions shall be taken as necessary to prevent erosion of the stockpiled material. Before fill is put into place, all trees, brush and stumps shall be removed from the area to be filled. These materials are not to be stockpiled in the resource area.

Finished grades shall be at elevations which provide a hydrologic connection between the replication area and the adjacent wetlands.

The final grading of the wetland soils shall result in no discontinuities in elevation upon removal of siltation barriers and other erosion control devices. The ground under the siltation barriers shall be reseeded (if necessary) when the barriers are removed.

Upon completion of the replication area, haybales and/or siltation fence shall be placed around the entire perimeter (of the replication area) to protect the replication area during the remainder of construction.

After replication construction is completed, no fertilizer, limestone, superphosphate or other amendments shall be added to the wetland soils.

REMOVING, STORING AND REPLACING OF EXISTING WETLAND TREES AND SHRUBS

In any disturbed wetland, the Applicant may, at his option, dig up, store and maintain existing wetland trees and shrubs for use in the replication area. Trees shall be a minimum of 4 inches in diameter and shrubs shall be twenty-four inches in spread or height. All plants shall be vigorous and well formed specimens. All plant materials dug by hand, hydraulic tree waste specifically designed for this purpose and other suitable equipment of sufficient size to remove the rootball. Rootball size shall be the minimum specified by the American Association of Nurserymen for each species. For hand dug plants, a suitable bucket or other wrap or container shall be provided to keep the rootball intact.

a. All plants dug for reuse shall be immediately moved to protective storage area established by the Botanist. Plants shall be set out on grade or in prepared holes and stored as necessary. The area or holes shall be identified with suitable tape to cover the rootball entirely and mulched to prevent erosion. All stored vegetation shall be maintained in a damp condition by regular watering. All horticultural measures required for the survival of collected plantings shall be utilized by the Applicant.

b. When the replication area has been constructed, stockpiled plants shall be replanted in locations specified and approved by the Botanist.

WETLAND REPLICATION PLANTING

Wetland Planting shall be performed between April 15 and October 15 or as recommended by the Botanist.

The Applicant shall have the copies of digging, storing and replanting existing trees and shrubs per the Plan Schedule, or alternatively, providing and planting new wetland species, purchased by the Applicant from nursery stock, and approved by the Botanist.

Wetland planting in the replication area will be performed in a manner which reproduces the placement and proportions of the plant species that were found in the original lost wetland area.

All wetland plantings will be performed by hand. Burlap will be removed from the top third of the rootball and ropes, twine and wire baskets will be completely removed from the rootball. Completely remove all plastic burlap, rope twine and wire baskets from the replication area. Completely remove the containers from the potted plants while keeping the soil around the roots undisturbed.

After plantings are completed, the replication area will be hand raked to eliminate piles of soil which may be created during digging and to eliminate compaction of the soil as much as possible. Raking will also be performed in order to maintain finish grades, established prior to planting.

The intent of this schedule is to have that of least 75 percent of the replication surface area is re-established with indigenous wetland plant species within two growing seasons of their planting in accordance with the Massachusetts Wetland Protection Act. Purple Loosestrife (*Lythrum Salicaria*) shall not be planted in the replication area. If after 180 growing season days, it is evident in the opinion of the Botanist or the Conservation Agent that it is unlikely that the 75 percent re-establishment requirement will be achieved, the Applicant shall provide and plant healthy wetland vegetation in sufficient quantities to achieve the 75 percent re-establishment.

Should, in the opinion of the Botanist, any wetland seeding be required, a Conservation mix will be utilized. The Conservation mix shall contain a minimum of five different wetland sedges and/or rushes.

WETLAND REPLICATION MONITORING


The Town of Westwood Conservation Commission will be notified 72 hours in advance of the commencement of the wetland replication construction.

All construction and planting will be overseen by a qualified Botanist.

Two reports, prepared by a qualified Botanist, will be submitted to the Town of Westwood Conservation Commission on May 1st and October 1st of each year.

Each report will include an observed species list, relative abundance of each species, percent cover of upland and wetland species, the viability of the plantings, and proposed remedial measures to ensure 75 percent re-establishment within two growing seasons.

If the replication area does not achieve the required 75 percent coverage within two growing seasons, then additional plantings will be provided as per Plan Schedule. These plantings will be monitored for the next two growing seasons with reports provided to the Town of Westwood Conservation Commission on May 1st and October 1st of each year in order to ensure the viability of these late plantings.

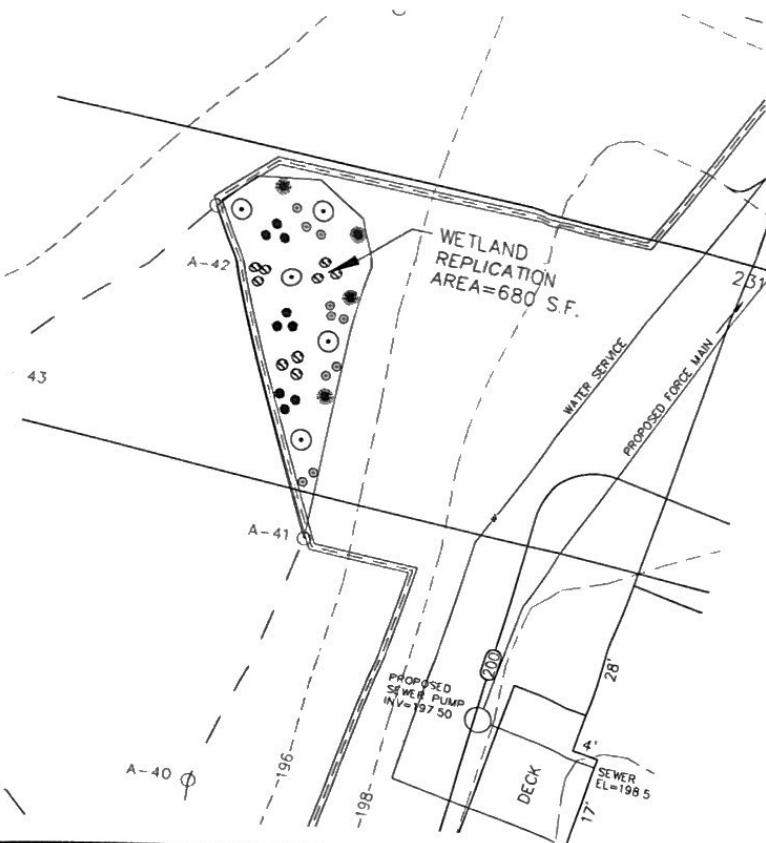

- PLANT LEGEND
- 5 - RED MAPLE (*Acer Redrum*)
(1 1/2" caliper)
 - 4 - WHITE PINE (*Pinus strobus*)
(1 1/2" caliper)
 - 9 - SWEET PEPPERBUSH (*Cistrea Ailanthia*)
(18" - 24" height)
 - 9 - HIGHBUSH BLUEBERRY (*Vaccinium corymbosum*)
(18" - 24" height)
 - 10 - SWAMP AZALEA (*Rhododendron viscosum*)
(18" - 24" height)

REVISIONS				FIELD	
No	DATE	DESCRIPTION	DES	CKD	BY OTHERS
					JMN
					JMN
					WML

GLM ENGINEERING
CONSULTANTS, INC
1750 WASHINGTON STREET
HOLLISTON, MASSACHUSETTS 01746
(508)429-1100 fax (508)429-7160



WETLAND REPLICATION PLAN
LOT 2B - MILL STREET
WESTWOOD, MA 02090
PREPARED FOR
SALVATORE VINCI
65 BAY COLONY DRIVE
WESTWOOD, MA 02090

JOB No 11074
DATE MARCH 9, 2001
PLAN No. 25600
SHEET No 3 of 3